

CATÁLOGO PROFESIONAL · PROFESSIONAL CATALOGUE

LIGHTING & ELECTRICAL

Iluminación · Carriles · Mecanismos
Lighting · Track systems · Switches

COLLECTION 2026

ZENRI TECHNOLOGY S.L. · MADRID · SPAIN



TRACK SYSTEM SMART



WHAT IS THE TRACK SYSTEM ZENRI SMART?

ZENRI SMART is a track system that enables remote lighting control from anywhere in the world and facilitates the creation of automated scenarios.

- 220V track: direct connection to the electrical network.
- Well-thought-out and functional accessories for creating various track contours.
- Includes a control panel, a converter, and a remote control.

TRACK INSTALLATION OPTIONS

1. recessed
2. surface-mounted
3. suspended


5 SERIES OF THE LIGHTS

1. GRILL
2. LINEAR
3. SPOT
4. MOON
5. RAY

FEATURES:

- 220V - no external power supply needed
- Simple system setup, eliminating the need for expert installation.
- Built-in dimming function for customizable lighting intensity.
- Adjustable color temperature ranging from 2700K to 6500K, allowing for warm to cool lighting settings.
- Versatile control options via an app, remote control, or touch panel for user convenience.
- Seamless integration with other smart devices to enable creative lighting scenarios.
- Multiple installation options to accommodate various spaces and design preferences.
- Reliable installation guaranteed by mechanical latches, ensuring secure and stable setup.
- Sturdy track construction, designed to maintain integrity over long distances without bending.
- Possibility of implementing large projects **ZENRI SMART** ZigBee.
- Integration with global smart systems such as KNX **ZENRI SMART** ZigBee

6

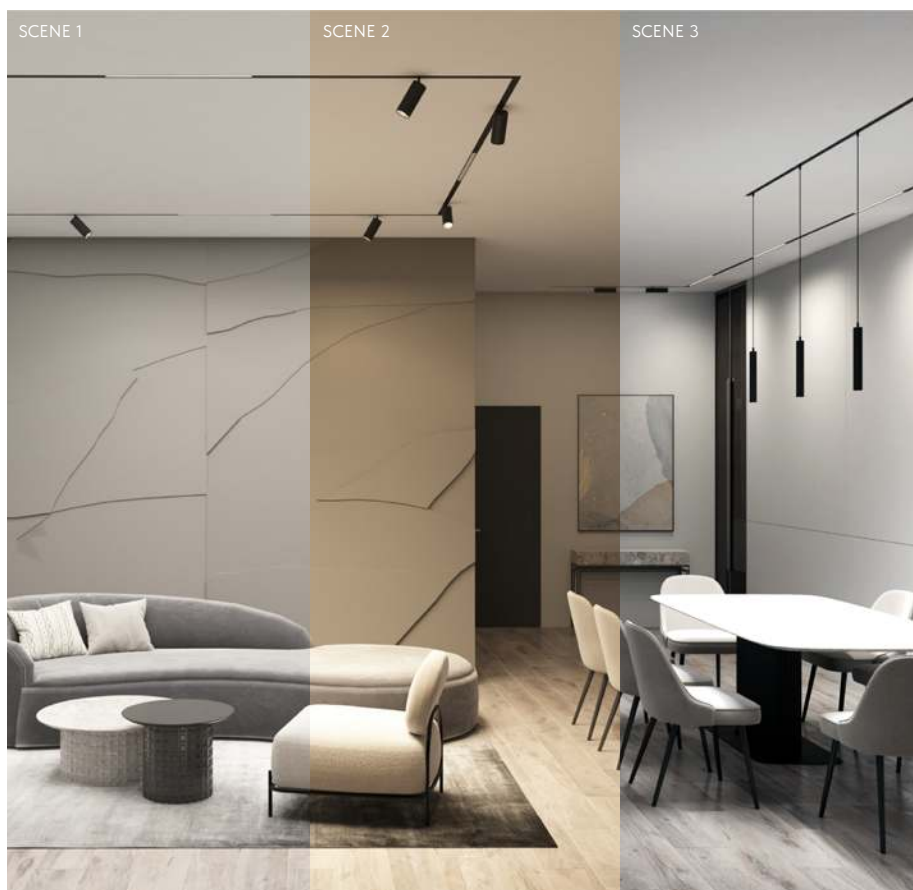

7

SMART GRILL



DK/EU-8001-BK
L = 220mm



DK/EU-8002-BK
DK/EU-8302-BK ZigBee
L = 406mm



DK/EU-8006-BK



8



9

SMART LINEAR

DK/EU-8003-BK
L = 220mm



DK/EU-8009-BK



DK/EU-8004-BK
DK/EU-8304-BK ZigBee
L = 400mm



DK/EU-8014-BK
DK/EU-8314-BK ZigBee



DK/EU-8005-BK
DK/EU-8305-BK ZigBee
L = 600mm




DK/EU-8026-BK
L = 800mm



DK/EU-8070-BK



DK/EU-8015-BK

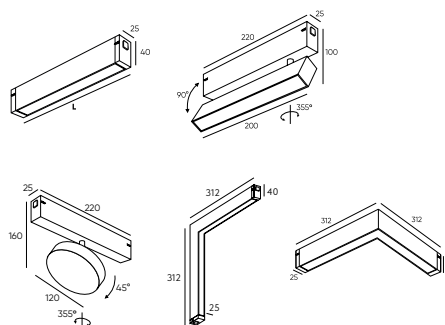

10



11

SMART SPOT

DK/EU-8010-BG
L = 100mm, D = 50mm



DK/EU-8010-BK
L = 100mm, D = 50mm



DK/EU-8008-BG



DK/EU-8008-BK
DK/EU-8308-BK ZigBee






DK/EU-8020-BG
L = 130mm, D = 60mm



DK/EU-8020-BK
DK/EU-8320-BK ZigBee
L = 130mm, D = 60mm



DK/EU-8012-BK




12




13

SMART MOON

DK/EU-8055-BK



DK/EU-8056-BK



14




15

SMART RAY

DK/EU-8060-BK



DK/EU-8064-BK



16



17

SMART BLE MESH / WI-FI CONTROL

DK/EU-7700-WF



WI-FI CONVERTER

Enables control of the SMART track system via the Tuya Smart mobile application and voice assistant. Connects to a home Wi-Fi network at a 2.4 GHz frequency. Allows for the control of lighting through the mobile application and voice assistant from anywhere in the world. Supports up to 128 lights. Offers the possibility to create automatic scenarios: turning lights on or off, as well as adjusting the lighting parameters based on the user's geolocation, time of day, weather, and other conditions.

DK/EU-7300-BK



REMOTE CONTROL FOR THE SMART TRACK SYSTEM

Allows adjust the brightness and color temperature of the lights in the track system. With the remote control, you can create up to 4 independent lighting groups and control them separately.

SMART BLUETOOTH CONTROL PANEL

Wireless wall-mounted panel for the SMART track system, available in surface-mounted or built-in versions. It controls brightness, color temperature, and up to 3 independent lighting groups. Powered by two AAA batteries, it requires no wiring and can be installed anywhere for seamless lighting management.

DK/EU-7500-BK

DK/EU-7500-WH



DK/EU-7501-BK

DK/EU-7501-WH



DK/EU-7405-BK



DK/EU-7508-WH

Recessed mounting box for
DK/EU-7501



18

SMART ZIGBEE CONTROL

DK/EU-7402-WF



WI-FI CONVERTER

A versatile hub supporting ZigBee 3.0, Bluetooth Mesh, and 2.4 GHz Wi-Fi to unify your smart home devices into a single, reliable network. It ensures stable local control and advanced automation via the Tuya Smart ecosystem.

Designed for seamless integration, this compact gateway offers effortless setup and intuitive management through mobile apps or voice assistants. The DK7402-WF is the perfect, low-profile core for any modern smart home.

DK/EU-7302-BK



REMOTE CONTROL FOR THE SMART TRACK SYSTEM

The SMART ZigBee Remote offers seamless control over brightness and color temperature for your track lighting. Featuring 8 programmable buttons, it allows you to assign specific lighting groups or custom scenes, providing ultimate flexibility and convenience at your fingertips.

DK/EU-7405-BK



WALL TOUCH PANEL FOR CONTROLLING THE SMART TRACK SYSTEM

A compact in-wall interface combining an intuitive touchscreen with a powerful Zigbee/Bluetooth gateway. Manage lighting scenes and smart devices globally via the Smart Life app or voice assistants (Siri, Google, Alexa). This all-in-one solution integrates seamlessly into any modern interior, offering total control without extra hardware.

19

SMART BASE

TRACK HOLDER 	TR/EU-2106-BK	Specifically designed for suspended installation of the track system, this set features a cable length of 150 cm, allowing for easy adjustment to suit various installation heights. All necessary mounting hardware is included, simplifying the installation process.
POWER SUPPLY 	TR/EU-2100-BK	Designed for connecting power to the track system, this component can be installed at any point along the track. It features a cable with a length of 330 mm.
STRAIGHT CONNECTOR 	TR/EU-2101-BK	Engineered for connecting tracks in a straight line while facilitating the transfer of electricity between them. Includes a connector plate for seamless integration.
FLEXIBLE CONNECTORS 	TR/EU-2103-BK	Specifically designed to facilitate the transfer of electricity between tracks in corner connections.
TRACK RAIL PVC COVER 	TR/EU-2010-BK 1 m	Designed for installation in sections of the track not occupied by lights, this component enhances the system's aesthetics. It offers the flexibility to be cut into sections of any desired length, allowing for a custom fit and a cohesive appearance.
END CAPS 	TR/EU-2107-BK 2 pieces	Essential for segmenting a single track into multiple, independently installed sections.
MECHANICAL SUSPENSION 	TR/EU-2126-BK 1,5 m TR/EU-2127-BK 5 m Essential for the suspended track mounting method.	POWER SUPPLY  TR/EU-2124-BK Power feed for suspended installation of the SMART BASE track. Adjustable length up to 5 m.

20

SMART BASE

TR/EU-2002-BK 2 m 		
TR/EU-2003-BK 3 m 		
TR/EU-2102-BK 		
TR/EU-2202-BK 		
TR/EU-2117-BK 		

21

SMART HIDE

TR/EU-2012-BK 2 m
TR/EU-2013-BK 3 m




TR/EU-2010-BK



TR/EU-2112-BK



TR/EU-2100-BK

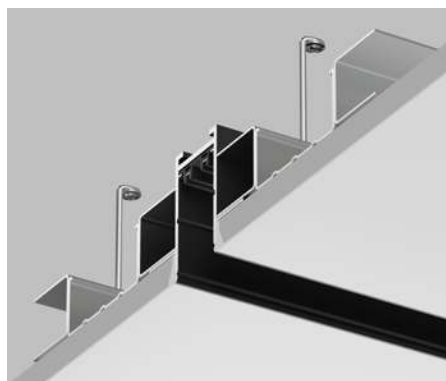

TR/EU-2113-BK



TR/EU-2118-BK



TR/EU-2107-BK



TR/EU-2101-BK



TR/EU-2114-BK



TR/EU-2115-BK



TR/EU-2116-BK




TR/EU-2103-BK



22

SMART ONE

TR/EU-2022-BK 2 m



TR/EU-2023-BK 3 m



TR/EU-2026-BK



TR/EU-2010-BK



TR/EU-2103-BK



TR/EU-2101-BK



TR/EU-2025-BK



TR/EU-2027-AL




TR/EU-3043-AL




TR/EU-3045-AL



23

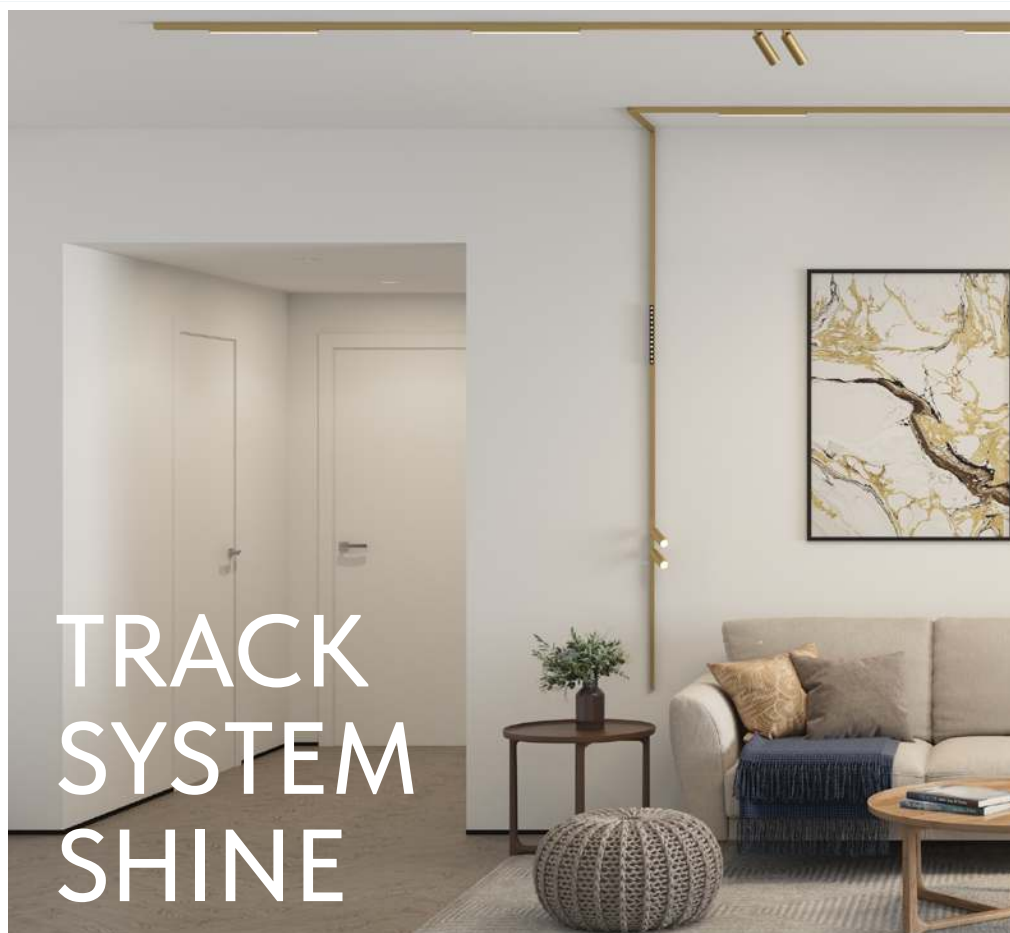

TRACK SYSTEM SHINE



WHAT IS THE TRACK SYSTEM ZENRI SHINE?

The exquisite collection SHINE consists of a track system, wall sconces, and surface-mounted spotlights for thoughtfully designed interiors. It is available in two shades: noble nickel and satin brass. The surface is treated with a special method, giving the products a refined texture. The system's lights emit a color temperature of (3000K) . The range also includes a series of smart lights that can adjust the color temperature within the 2700-6000K . A high color rendering index (CRI > 90) allows for accurate color reproduction and creates comfortable lighting.

FEATURES:

- 48V - maximum safety
- Track width is only 19 mm
- Surface mounting - suitable for finished renovations
- 4 series of track lights, 1 series of ceiling lights, and 1 series of wall sconces
- 2 track colors: satin brass and noble nickel
- Ideal for room zoning
- Mounting accessories for all surfaces in the room
- Ability to create any shape of the system

The 48V magnetic track system can be installed either as surface-mounted or suspended. The track features compact dimensions — its width is only 19 mm, making the design lightweight and visually refined. It includes various light models, providing either general or accent lighting.

4 SERIES OF THE LIGHTS

1. GRILL
2. LINEAR
3. SPOT
4. FLOW

26



27

SHINE GRILL

DK/EU-5771-SB ●
DK/EU-5971-SB ● ZigBee




DK/EU-5771-DN ●
DK/EU-5971-DN ● ZigBee



DK/EU-5772-SB ●



DK/EU-5772-DN ●

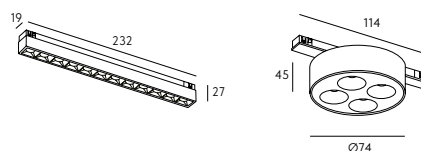

28

SHINE LINEAR

DK/EU-5751-SB ●
DK/EU-5951-SB ● ZigBee
L = 301mm



DK/EU-5751-DN ●
DK/EU-5951-DN ● ZigBee
L = 301mm



DK/EU-5752-SB ●
DK/EU-5952-SB ● ZigBee
L = 601mm




DK/EU-5752-DN ●
DK/EU-5952-DN ● ZigBee
L = 601mm



29

SHINE SPOT

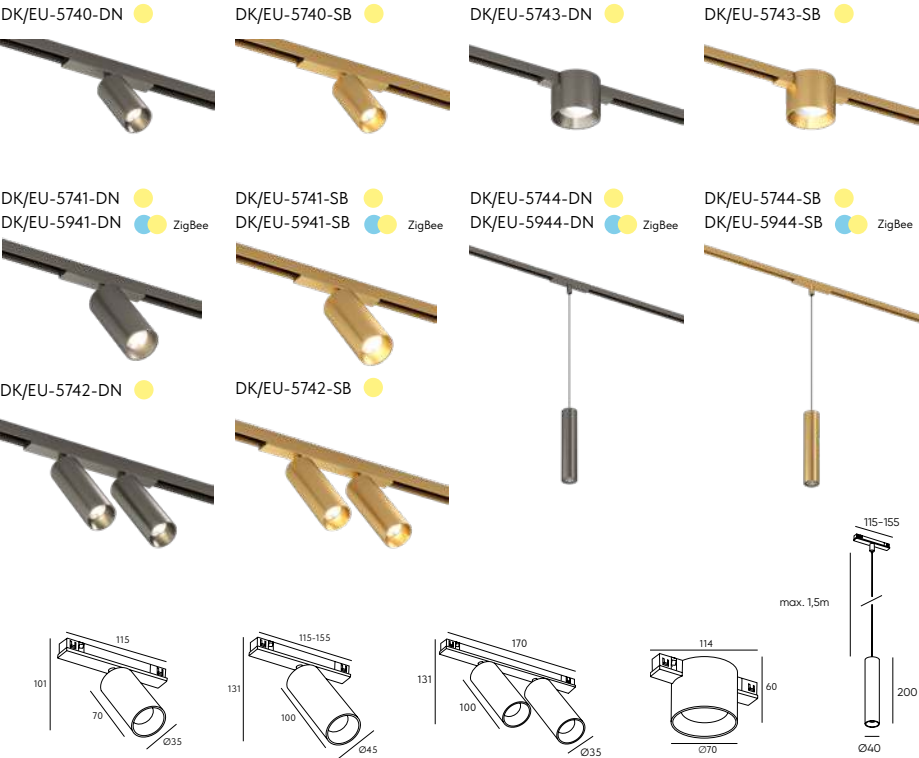

30



SHINE FLOW

DK/EU-5761-SB

H = 45mm, D = 74mm



DK/EU-5761-DN

H = 45mm, D = 74mm




DK/EU-5762-SB

H = 45mm, D = 95mm



DK/EU-5762-DN

H = 45mm, D = 95mm



32

SHINE TUBE

DK/EU-2610-DN

H = 80mm, D = 70mm



DK/EU-2610-SB

H = 80mm, D = 70mm




DK/EU-2615-DN

H = 115mm, D = 45mm



DK/EU-2615-SB

H = 115mm, D = 45mm




33

SHINE WALL

DK/EU-5072-DN ●



DK/EU-5072-SB ●



34

SHINE OPTICS

SHINE OPTICS is a professional solution for adjusting the scattering angle in the luminaires of the SHINE collection. Interchangeable lenses make it easy to adapt the lamp to specific tasks, providing maximum flexibility without the need to replace the device itself.

In the basic configuration, the luminaires are equipped with a lens with a scattering angle of 36°. Thanks to the SHINE OPTICS lenses, it is possible to easily and simply change the angle by 15°.

The lenses can be easily replaced without the use of tools. They are made of optical acrylic and provide a clear, controlled luminous flux without glare.

DK/EU-5700-D25-A15
SUPER SPOT 15°DK/EU-5700-D35-A15
SUPER SPOT 15°DK/EU-5700-D55-A15
SUPER SPOT 15°

35

SHINE ZIGBEE CONTROL

DK/EU-7402-WF



WI-FI CONVERTER



A versatile hub supporting ZigBee 3.0, Bluetooth Mesh, and 2.4 GHz Wi-Fi to unify your SHINE smart home devices into a single, reliable network. It ensures stable local control and advanced automation via the Tuya Smart ecosystem. Designed for seamless integration, this compact gateway offers effortless setup and intuitive management through mobile apps or voice assistants. The perfect, low-profile core for any modern SHINE system.

DK/EU-7302-BK



REMOTE CONTROL FOR THE SHINE TRACK SYSTEM

The SHINE ZigBee Remote offers seamless control over brightness and color temperature for your track lighting. Featuring 8 programmable buttons, it allows you to assign specific lighting groups or custom scenes, providing ultimate flexibility and convenience at your fingertips.


DK/EU-7405-BK



WALL TOUCH PANEL FOR THE SHINE TRACK SYSTEM

A compact in-wall interface combining an intuitive touchscreen with a powerful Zigbee/Bluetooth gateway for the SHINE system. Manage lighting scenes and smart devices globally via the Smart Life app or voice assistants (Siri, Google, Alexa). This all-in-one solution integrates seamlessly into any modern interior, offering total control without extra hardware.

36

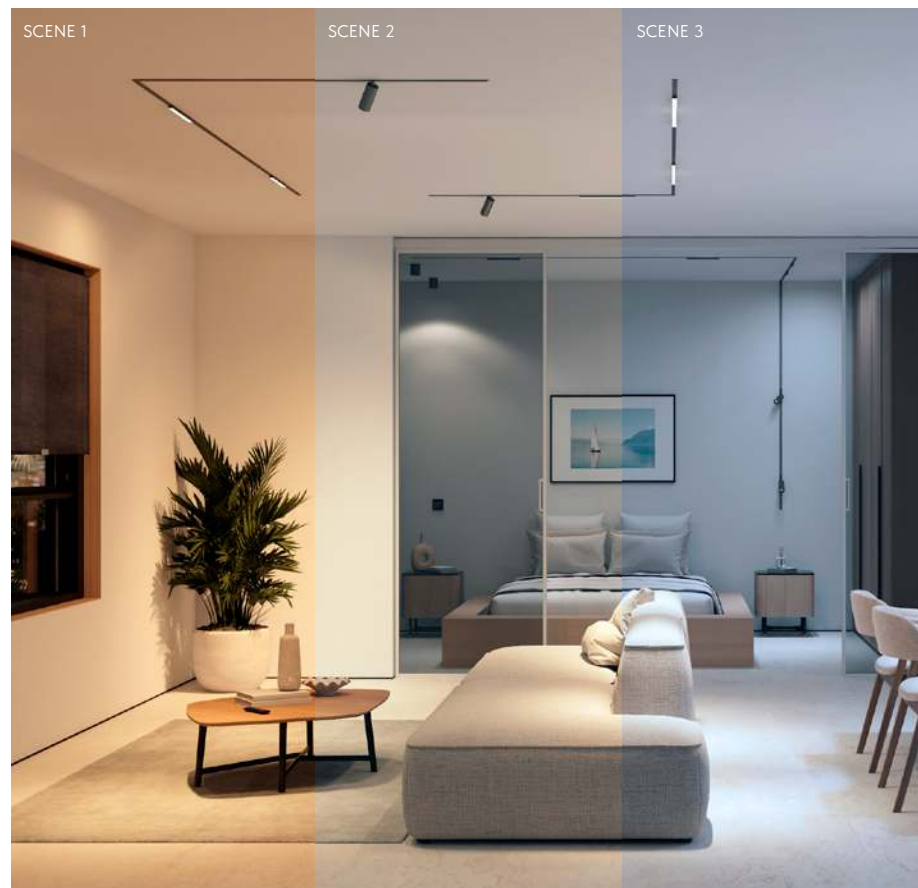

37

SHINE BASE

Track SHINE BASE



■ TR/EU-5710-DN	1 m
■ TR/EU-5710-SB	1 m
■ TR/EU-5715-DN	1,5 m
■ TR/EU-5715-SB	1,5 m
■ TR/EU-5716-DN	2 m
■ TR/EU-5716-SB	2 m

The SHINE BASE track can be surface-mounted on the ceiling or suspended using hangers (TR/EU-5718). Safe voltage: 48V. The conductive elements are located in a recessed area at the ends of the track, making them completely invisible. Can be installed in finished interiors.

Track SHINE HIDE



■ TR/EU-5702-DN	2 m
■ TR/EU-5702-SB	2 m

The SHINE HIDE track is designed for 12,5 mm thick drywall ceilings. It operates at a safe 48V voltage. The conductive elements are recessed into the inner corners of the track, making them completely invisible for a clean, professional finish.

Power feed



■ TR/EU-5721-DN	
■ TR/EU-5721-SB	

Universal power feed for SHINE BASE track. Can be installed at the track's end or in the middle.

Electrical straight connector



■ TR/EU-5722-DN	
■ TR/EU-5722-SB	

Electrical straight connector for SHINE BASE track. Transfers power between two tracks arranged sequentially.

Electrical connector 90° ceiling-to-ceiling



■ TR/EU-5723-DN	
■ TR/EU-5723-SB	

Electrical connector for SHINE BASE track, 90° ceiling-to-ceiling connection. Designed to transmit power between tracks. Inserts into the 90° angle element TR/EU-5731.

Electrical connector



■ TR/EU-5724-DN	
■ TR/EU-5724-SB	

Electrical connector for SHINE BASE track, 90° wall-to-ceiling connection. Transfers power between two tracks positioned at an arbitrary angle. Used together with angle element TR/EU-5732.

Angle element



■ TR/EU-5731-DN	
■ TR/EU-5731-SB	

Angle element for the SHINE BASE track allows connecting two tracks at a 90° angle without cutting. Used together with connector TR/EU-5723.

38

Angle element



■ TR/EU-5705-DN	
■ TR/EU-5705-SB	

The SHINE HIDE corner element is designed for 12,5 mm thick drywall ceilings, allowing for a seamless 90° connection between two tracks.

Angle element



■ TR/EU-5732-DN	
■ TR/EU-5732-SB	

Angle element for the SHINE BASE track allows connecting two tracks at a wall-to-ceiling 90° angle. Used together with connector TR/EU-5724.

End cap



■ TR/EU-5735-DN	
■ TR/EU-5735-SB	

End cap for SHINE BASE track, installed at the track ends.

End cap



■ TR/EU-5735H-DN	
■ TR/EU-5735H-SB	

End cap for SHINE BASE track, installed at the track ends.

Decorative cover



■ TR/EU-5736-DN	200 mm
■ TR/EU-5736-SB	200 mm
■ TR/EU-5737-DN	500 mm
■ TR/EU-5737-SB	500 mm

Decorative cover for the SHINE BASE track channel. Conceals internal elements of the track, giving the product an aesthetic and finished look.

Built-in power supply



■ TR/EU-5739-DN	
■ TR/EU-5739-SB	

Built-in power supply unit for SHINE BASE track. Installed inside the track. Converts mains voltage to the track system's operating voltage DC 48V.

Power feed for suspended mounting of SHINE BASE track




■ TR/EU-5717-DN	
■ TR/EU-5717-SB	
Power feed for suspended mounting of SHINE BASE track. Adjustable length up to 2 m. Essential for suspended mounting method.	

Mechanical hanger



■ TR/EU-5718-DN	
■ TR/EU-5718-SB	
Mechanical hanger for SHINE BASE track. Adjustable length up to 2 m. Essential for suspended mounting method.	

39

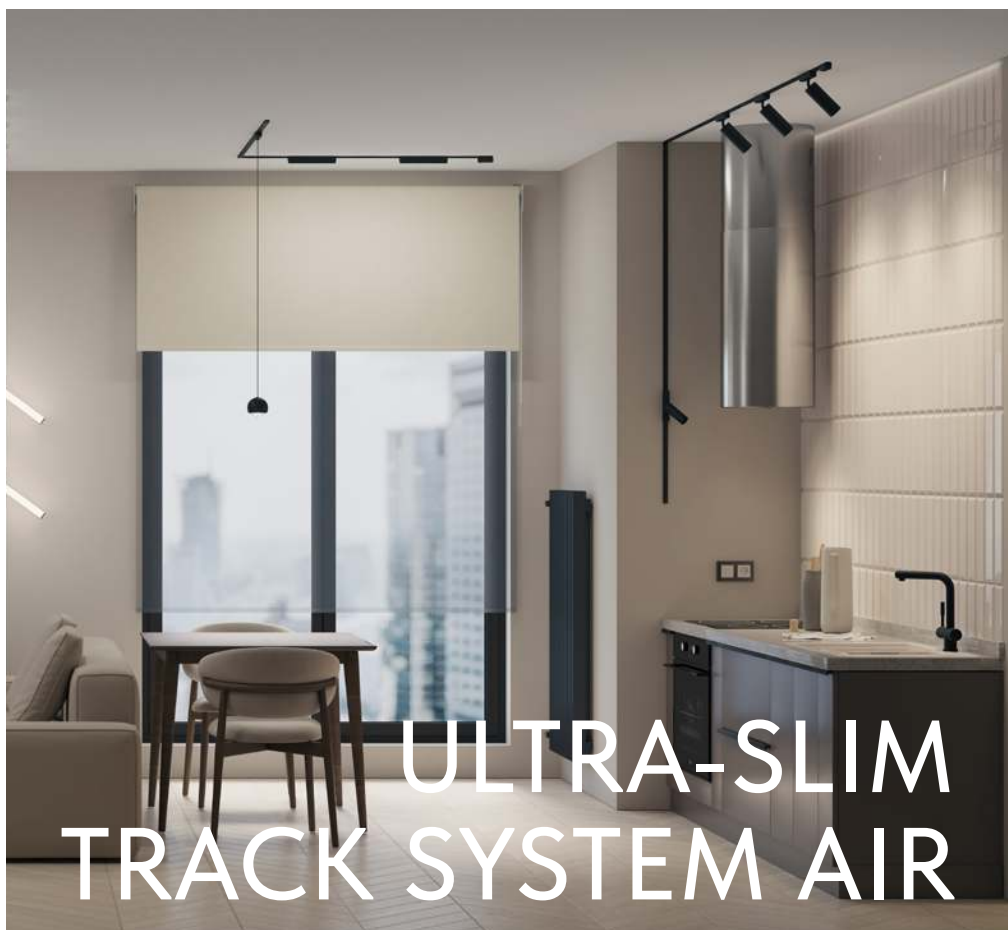

ULTRA-SLIM TRACK SYSTEM AIR

ULTRA-SLIM TRACK SYSTEM AIR



WHAT IS THE TRACK SYSTEM AIR?

AIR is an 18mm wide, ultra-slim magnetic track system designed for surface mounting and operated at 48V. It is ideally suited for installations in completed renovations. The system's lights emit a color temperature of 3000K, 4000K. The range also includes a series of smart lights that can adjust the color temperature within the 2700-6500K range, be dimmed, and controlled remotely via an app. This is made possible thanks to a set of devices: a surface-mounted wall panel, a Wi-Fi converter, and a remote control.

- An 18mm wide magnetic aluminum track, operated at 48V, for a sleek and modern look.
- Well-thought-out and functional accessories, enabling the creation of various track contours.
- Six series of lights, each showcasing a minimalist design.

FEATURES:

- 48V - maximum safety
- Track width is only 18 mm, thickness 7 mm
- Surface mounting - suitable for finished renovations
- 6 series of lights
- 3 track colors
- SMART AIR light series with remote control
- Easy and reliable installation with a double fastening system: mechanical latches and magnets
- Ability to create a floating track
- Ideal for room zoning
- Mounting accessories for all surfaces in the room
- Ability to create any shape of the system

6 SERIES OF LIGHTS

- | | |
|-----------|-----------|
| 1. GRILL | 4. HANG |
| 2. LINEAR | 5. REFLEX |
| 3. SPOT | 6. RAY |



43

AIR GRILL

DK/EU-5305-BK ●
DK/EU-5335-BK ○



DK/EU-5308-BK ●
DK/EU-5338-BK ○
DK/EU-5368-BK ●●



DK/EU-5304-WH ●





DK/EU-5307-WH ●



DK/EU-5305-WH ●
DK/EU-5335-WH ○



DK/EU-5308-WH ●
DK/EU-5338-WH ○
DK/EU-5368-WH ●●



44



45

AIR LINEAR

DK/EU-5300-BK ●
DK/EU-5330-BK ○
DK/EU-5360-BK ●●

DK/EU-5303-BK ●
DK/EU-5333-BK ○
DK/EU-5363-BK ●●




DK/EU-5299-WH ●

DK/EU-5300-WH ●
DK/EU-5330-WH ○
DK/EU-5360-WH ●●

DK/EU-5301-WH ●
L = 340 mm

DK/EU-5303-WH ●
DK/EU-5333-WH ○
DK/EU-5363-WH ●●

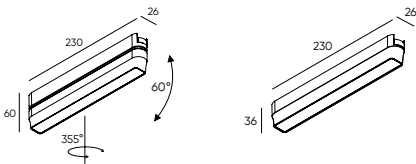

46



47

AIR SPOT

DK/EU-5310-BK ●
DK/EU-5340-BK ○

H = 147mm, D = 40mm



DK/EU-5310-WH ●

H = 147mm, D = 40mm



DK/EU-5311-BK ●
DK/EU-5341-BK ○
DK/EU-5371-BK ●

H = 160mm, D = 50mm



DK/EU-5311-WH ●
DK/EU-5341-WH ○
DK/EU-5371-WH ●



H = 160mm, D = 50mm



DK/EU-5313-BK ●
DK/EU-5343-BK ○



DK/EU-5313-WH ●
DK/EU-5343-WH ○




48

AIR REFLEX

DK/EU-5320-BK ●
DK/EU-5350-BK ○



DK/EU-5320-WH ●
DK/EU-5350-WH ○



49

AIR HANG


DK/EU-5315-BK ●
DK/EU-5345-BK ○
DK/EU-5375-BK ●●



DK/EU-5317-BK ●
DK/EU-5347-BK ○



DK/EU-5315-WH ●
DK/EU-5345-WH ○
DK/EU-5375-WH ●●



50

AIR RAY

DK/EU-5325-BK ●
DK/EU-5355-BK ○





DK/EU-5325-WH ●



DK/EU-5327-BK ●
DK/EU-5357-BK ○



DK/EU-5327-WH ●

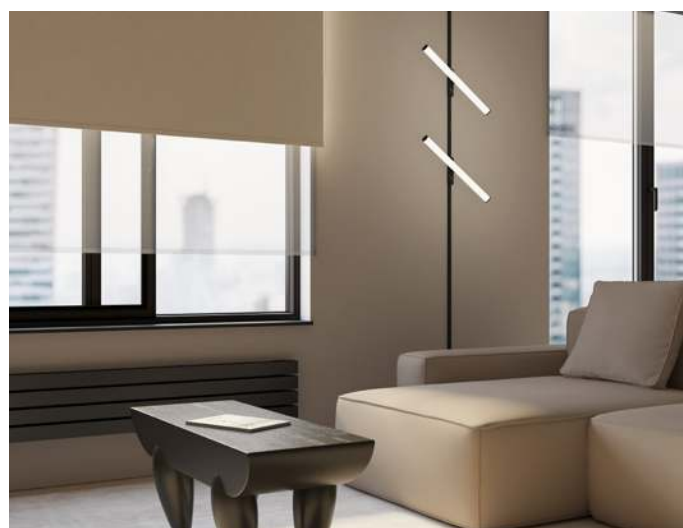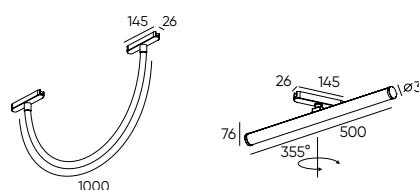

51

AIR BLE MESH / WI-FI CONTROL

DK/EU-7700-WF



WI-FI CONVERTER

Enables control of the SMART track system via the Tuya Smart mobile application and voice assistant. Connects to a home Wi-Fi network at a 2.4 GHz frequency. Allows for the control of lighting through the mobile application and voice assistant from anywhere in the world. Supports up to 128 lights. Offers the possibility to create automatic scenarios: turning lights on or off, as well as adjusting the lighting parameters based on the user's geolocation, time of day, weather, and other conditions.

DK/EU-7300-BK



REMOTE CONTROL FOR THE SMART TRACK SYSTEM

Allows adjust the brightness and color temperature of the lights in the track system. With the remote control, you can create up to 4 independent lighting groups and control them separately.

SMART BLUETOOTH CONTROL PANEL

Wireless wall-mounted panel for the SMART track system, available in surface-mounted or built-in versions. It controls brightness, color temperature, and up to 3 independent lighting groups. Powered by two AAA batteries, it requires no wiring and can be installed anywhere for seamless lighting management.

DK/EU-7500-BK
DK/EU-7500-WHDK/EU-7501-BK
DK/EU-7501-WH

DK/EU-7405-BK

DK/EU-7508-WH
Recessed mounting box for
DK/EU-7501

52



53

AIR BASE

ULTRA-SLIM TRACK



TR/EU-5201-BK	1 m
TR/EU-5202-BK	2 m
TR/EU-5201-WH	1 m
TR/EU-5202-WH	2 m
TR/EU-5202-GO	2 m

Designed for versatile installation on both the ceiling and wall. Operates at a safe voltage of 48V. The conductive elements are ingeniously positioned at the track's ends, within a recess, rendering them completely invisible. Additionally, its design is perfectly suited for integration into finished renovations.

STRAIGHT CONNECTOR



TR/EU-5230-BK
TR/EU-5230-WH

Enables the connection of two tracks in a straight line on the ceiling or the wall, ensuring power transfer between them.

L-CONNECTOR 90°



TR/EU-5231-BK
TR/EU-5231-WH

Enables the connection of two tracks at a right angle on the ceiling or the wall, ensuring power transfer between them.

L-CONNECTOR 90°



TR/EU-5232-BK
TR/EU-5232-WH

Enables the connection of two tracks at a right angle at the wall-ceiling transition, facilitating power transfer between them.

T-TYPE CONNECTOR



TR/EU-5233-BK
TR/EU-5233-WH

T-type connector for track AIR BASE

X-TYPE CONNECTOR



TR/EU-5234-BK
TR/EU-5234-WH

X-type connector for track AIR BASE

DECORATIVE PLUG



TR/EU-5235-BK
TR/EU-5235-WH

Decoratively frames the track and aids in the connection of tracks. Compatible with both straight and corner connectors for versatile installation options.

54

POWER SUPPLY



TR/EU-5215-BK
TR/EU-5215-WH

Can be installed at any point along the track to supply power, ensuring flexible and convenient power distribution.

L-CONNECTOR 90°



TR/EU-5213-BK
TR/EU-5213-WH


Incorporates a movable element that enables the connection of tracks in two planes at any angle, offering unparalleled flexibility in track layout.

EXTERNAL POWER SUPPLY



TR/EU-5220-BK
TR/EU-5220-WH

Installed at a break in the track or at its end, this component converts the primary nominal voltage to 48V.

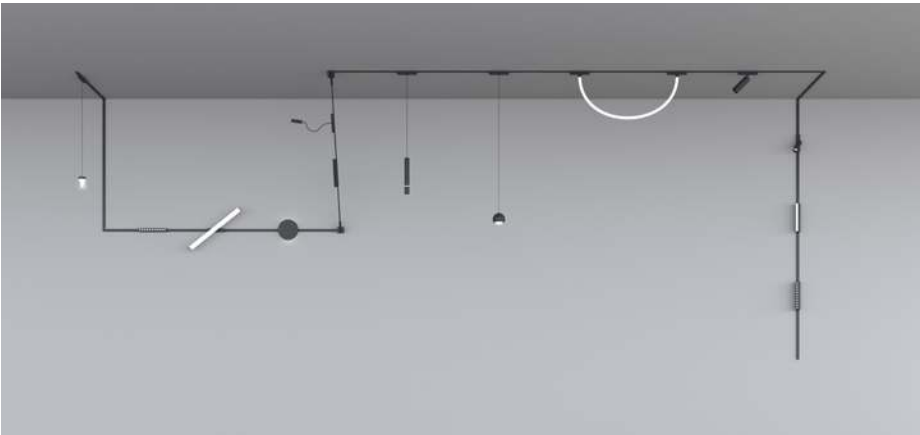

55

Slim LED




ZENRI SLIM LED modules represent an evolution in LED technology, serving as the perfect light source for recessed luminaires. They maximize room height, requiring minimal space above the ceiling for maintenance and service.

ADVANTAGES:

- For accent lighting: beam angle of 60°
- CRI>80 for accurate color rendering
 - Comfortable light with a flicker coefficient of less than 2%
 - Includes a 3-year warranty
 - Minimum height 20mm for modules 7W and 25mm for modules 8W

WHICH BULBS CAN BE REPLACED WITH SLIM LED MODULES?

ZENRI SLIM LED modules can replace any standard bulb (halogen, fluorescent, LED) of MR16 size with a diameter of 50 mm. These bulbs are most commonly LED bulbs with a GU10 or GU5.3 base

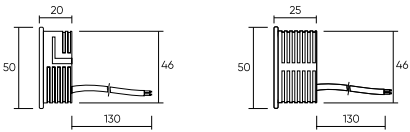

DK/EU-3000-7W
DK/EU-4000-7W



DK/EU-3000-7W-M
DK/EU-4000-7W-M



DK/EU-3000-8W DIM
DK/EU-4000-8W DIM
dimnable




56



57

SBC




DK/EU-3072-SCB



The mounting plate for recessed spotlights is specially designed for stretch ceilings. Using this product significantly simplifies the installation of lighting fixtures. Compatible with the **ZENRI** RODVIG series. Not compatible with fixtures from other manufacturers.



58

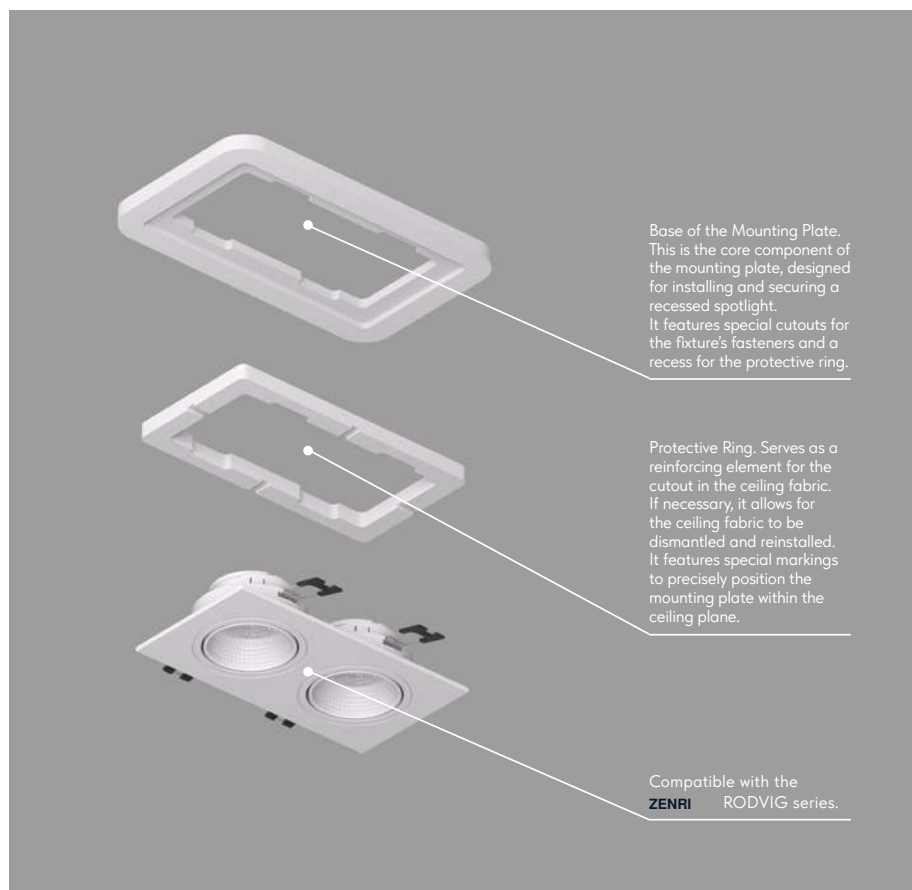

59

RELAY



Smart Wi-Fi relays allow you to control the lighting using a mobile device via the SMART LIFE app, as well as using voice assistants such as Siri. They also allow you to create automatic lighting scenarios. The dimmer relays control the lighting using the TRIAC protocol and are compatible with SLIM LED dimmable modules. It is not allowed to use dimmer relays in conjunction with light sources that are not designed for TRIAC dimming. By connecting to a conventional keypad switch, the smart relay fully retains its functionality. It only works with switches without backlight.


RL/EU-1001-SM



RL/EU-1002-SM



RL/EU-1003-DM




60


The option of placing the **ZENRI** RELAY in a sub-cabinet



Placement in a
desoldering box

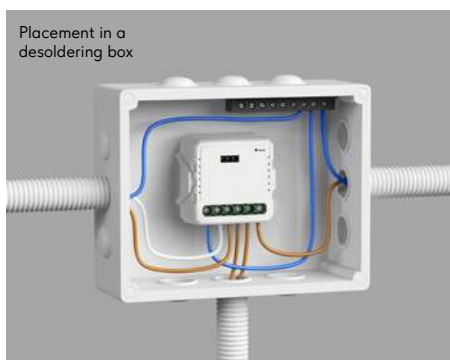

Placement at the base
of the lamp

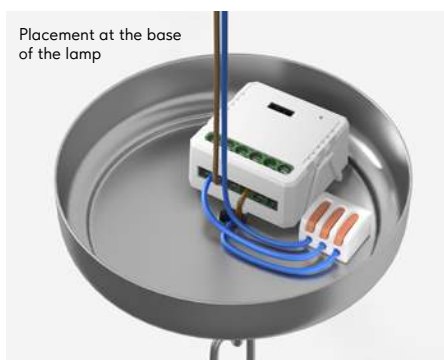

61



SPOTLIGHTS



The **ZENRI** brand offers a variety of contemporary designs in both recessed and surface-mounted spotlights.

ALL OF OUR PRODUCTS FEATURE WIDE FUNCTIONALITY, ENSURING THAT THEY MEET THE NEEDS OF ANY TURNKEY PROJECT

1. Recessed waterproof spotlights designed for humid areas.
2. The plaster-in spotlight offers a seamlessly smooth transition between the light body and the ceiling surface. Its installation technology allows the light to become invisible under a layer of plaster, creating a flawlessly integrated appearance.»
3. Classic spotlights suitable for both recessed and surface mounting

All products are made from a heat-resistant polymer commonly used in motorcycle parts manufacturing. This ensures enhanced strength and resistance to ultraviolet rays, without fading.

64



65

RODVIG


DK/EU-3061-WH



DK/EU-3061-CT



DK/EU-3061-BK




DK/EU-3071-WH



DK/EU-3071-CT




DK/EU-3071-BK



DK/EU-3072-WH



DK/EU-3072-BK




DK/EU-3090-WH




DK/EU-3090-CT



DK/EU-3090-BK



66

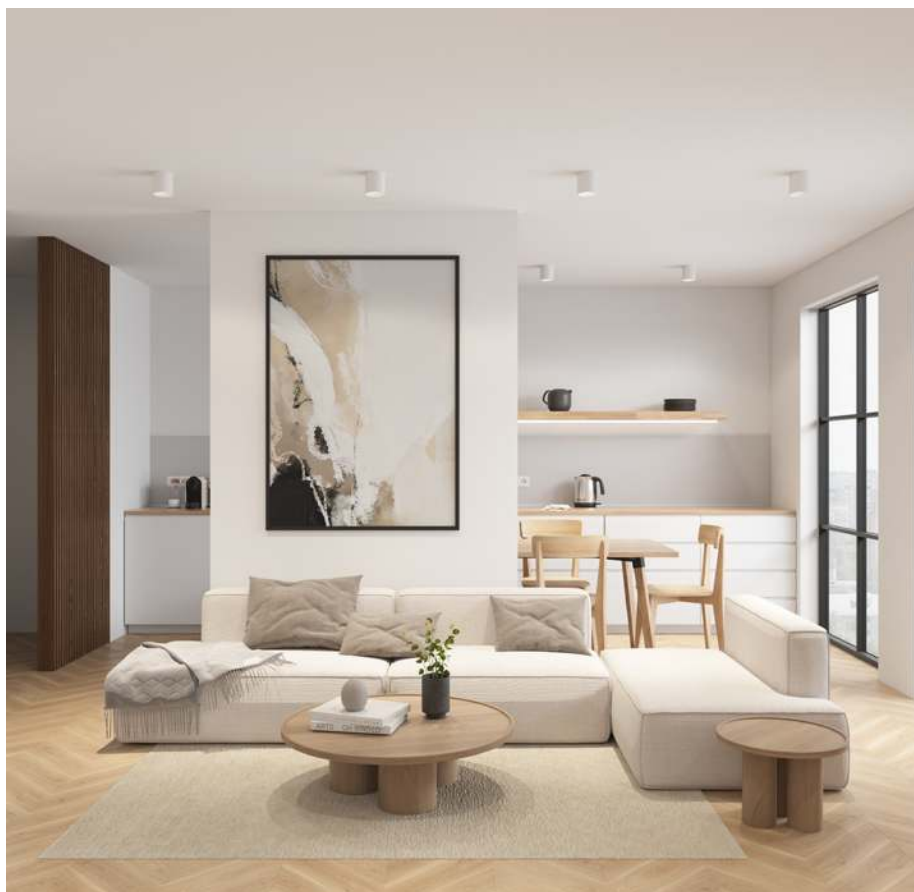

67

VIBI


DK/EU-3055-WH



DK/EU-3055-BK



DK/EU-TSA-70x115
Drywall Hole Saw with Beveler



68



69


PORT

WATERPROOF SERIES

DK/EU-3101-WH



DK/EU-3101-BK



70




DEEP

WATERPROOF SERIES

DK/EU-3103-WH



DK/EU-3103-BK



71



INSTALLATION FEATURES	
	Easy installation into the stretch ceilings. The recessed spotlights compatible with standard thermal rings for stretch ceilings. Installation of these spotlights does not require high qualifications and can be performed by any ceiling installer
	The diameter of the spotlight body allows for placement in the Flod decorative ceiling niche
	Designed for indoor using
	For plaster
ELECTRICAL PARAMETERS	
220V	Suitable for operation at 220V mains voltage. Does not require additional voltage converters
48V	Suitable for operation at 48V reduced voltage. Connection should be made through a power supply with corresponding characteristics
LIGHT TECHNICAL PARAMETERS	
Color Rendering Index (CRI)	The CRI indicates the ability of a light source to accurately reproduce the colors of illuminated objects without distortion. The higher the value, the better the color rendition
CRI >90	Enhanced CRI value. Close to the ideal indicator
CRI >80	High CRI value, typical for LED light sources from known brands
Beam angle	Determines the angle at which the optical part of the luminaire emits light into space. This parameter is specific to luminaires with built-in LEDs. It does not apply to lights using replaceable bulbs, as the beam angle in such models depends on the characteristics of the bulb used
	A medium beam angle is a compromise between wide and narrow angles
	A wide beam angle is typical for general flood light luminaires. Well suited for uniform illumination of a space
LIGHT SOURCE	
LED	Built-in LED
	Uses a replaceable LED bulb with a GU10 base, up to 15W
	Compatible with ultra-thin ZENRI Slim LED modules

72

CERTIFICATION, STANDARDS, AND WARRANTY	
	Our products comply with EU safety directives
	EU directive on the absence of harmful substances. Safe for health
	3-year warranty on the entire ZENRI product range
CONTROL	
	Controlled by the Tuya smart home ecosystem
	Controlled by the Smart Life app
	Controlled by Home Assistant
	Controlled by Siri
	"Features a smooth brightness adjustment in a wide range from 1 to 100%. Controlled by SMART Control accessories. Note: Not suitable for control by standard dimmers"
	Features a smooth color temperature adjustment in a wide range from 3000 to 6000K
	Control via mobile app over a 2.4 GHz Wi-Fi network
	Bluetooth control
	ZigBee control
DUST AND MOISTURE PROTECTION RATINGS	
The first digit in the IP code indicates protection against solid objects, while the second indicates protection against moisture	
Dust	Water
	No
	Splashes
	Water jet
OTHER INDICATIONS	
	Novelty

73

TRACK SYSTEM SMART

SKU	VOLTAGE	LUMINOUS FLUX	CASE COLOR	L (LENGTH)	D (DIAMETER)	ANGLE
DK/EU-8001-BK	9 W	800 Lm	black	220 mm	-	24°
DK/EU-8002-BK	18 W	1 600 Lm	black	406 mm	-	24°
DK/EU-8006-BK	9 W	800 Lm	black	200 mm	-	24°
DK/EU-8003-BK	9 W	760 Lm	black	220 mm	-	120°
DK/EU-8004-BK	18 W	1 520 Lm	black	406 mm	-	120°
DK/EU-8005-BK	27 W	2 268 Lm	black	600 mm	-	120°
DK/EU-8014-BK	18 W	1 520 Lm	black	312*312 mm	-	120°
DK/EU-8015-BK	18 W	1 520 Lm	black	312*312 mm	-	120°
DK/EU-8009-BK	9 W	760 Lm	black	220 mm	-	120°
DK/EU-8010-BK	9 W	780 Lm	black	100 mm	50 mm	24°
DK/EU-8010-BG	9 W	780 Lm	matte gold	100 mm	50 mm	24°
DK/EU-8020-BK	20 W	1 800 Lm	black	130 mm	60 mm	24°
DK/EU-8020-BG	20 W	1 800 Lm	matte gold	130 mm	60 mm	24°
DK/EU-8008-BK	9 W	770 Lm	black	300 mm	40 mm	24°
DK/EU-8008-BG	9 W	770 Lm	matte gold	300 mm	40 mm	24°
DK/EU-8055-BK	12 W	950 Lm	white acrylic/black	-	110 mm	120°
DK/EU-8056-BK	12 W	950 Lm	white acrylic/black	-	110 mm	120°
DK/EU-8060-BK	18 W	1600 Lm	white acrylic	1500 mm	-	360°
DK/EU-8026-BK	36 W	3040 Lm	black	800 mm	-	120°
DK/EU-8012-BK	2*9 W	1560 Lm	black	100 mm	50 mm	24°
DK/EU-8070-BK	16 W	1350 Lm	black	120 mm	-	120°
DK/EU-8302-BK	18 W	1 600 Lm	black	406 mm	-	24°
DK/EU-8304-BK	18 W	1 520 Lm	black	406 mm	-	120°
DK/EU-8305-BK	27 W	2 268 Lm	black	600 mm	-	120°
DK/EU-8314-BK	18 W	1 520 Lm	black	312*312 mm	-	120°
DK/EU-8320-BK	20 W	1 800 Lm	black	130 mm	60 mm	24°
DK/EU-8308-BK	9 W	770 Lm	black	300 mm	40 mm	24°

74

TRACK SYSTEM SHINE

SKU	VOLTAGE	ANGLE	LUMINOUS FLUX	CASE COLOR	H (HEIGHT)	D (DIAMETER)	L (LENGTH)
DK/EU-5771-DN	10	36°	790	Dark nickel	27	-	231
DK/EU-5771-SB	10	36°	790	Satin brass	27	-	231
DK/EU-5772-DN	6	36°	390	Dark nickel	45	74	114
DK/EU-5772-SB	6	36°	390	Satin brass	45	74	114
DK/EU-5751-DN	12	120°	780	Dark nickel	27	-	301
DK/EU-5751-SB	12	120°	780	Satin brass	27	-	301
DK/EU-5752-DN	24	120°	1600	Dark nickel	27	-	601
DK/EU-5752-SB	24	120°	1600	Satin brass	27	-	601
DK/EU-5740-DN	6	36°	420	Dark nickel	70	35	-
DK/EU-5740-SB	6	36°	420	Satin brass	70	35	-
DK/EU-5741-DN	10	36°	770	Dark nickel	100	45	-
DK/EU-5741-SB	10	36°	770	Satin brass	100	45	-
DK/EU-5742-DN	8*2	36°	1100	Dark nickel	100	35	-
DK/EU-5742-SB	8*2	36°	1100	Satin brass	100	35	-
DK/EU-5743-DN	8	36°	630	Dark nickel	60	70	-
DK/EU-5743-SB	8	36°	630	Satin brass	60	70	-
DK/EU-5744-DN	8	36°	500	Dark nickel	200	40	-
DK/EU-5744-SB	8	36°	500	Satin brass	200	40	-
DK/EU-2610-DN	10	36°	730	Dark nickel	80	70	-
DK/EU-2610-SB	10	36°	730	Satin brass	80	70	-
DK/EU-2615-DN	7	36°	470	Dark nickel	115	45	-
DK/EU-2615-SB	7	36°	470	Satin brass	115	45	-
DK/EU-5761-DN	6	120°	360	Dark nickel	45	74	-
DK/EU-5761-SB	6	120°	360	Satin brass	45	74	-
DK/EU-5762-DN	8	120°	550	Dark nickel	45	95	-
DK/EU-5762-SB	8	120°	550	Satin brass	45	95	-
DK/EU-5072-DN	3	36°	180	Dark nickel	68	104	-
DK/EU-5072-SB	3	36°	180	Satin brass	68	104	-

75

SKU	VOLTAGE	ANGLE	LUMINOUS FLUX	CASE COLOR	H (HEIGHT)	D (DIAMETER)	L (LENGTH)
DK/EU-5971-DN	10	36°	790	Dark nickel	27	-	231
DK/EU-5971-SB	10	36°	790	Satin brass	27	-	231
DK/EU-5951-DN	12	120°	780	Dark nickel	27	-	301
DK/EU-5951-SB	12	120°	780	Satin brass	27	-	301
DK/EU-5952-DN	24	120°	1600	Dark nickel	27	-	601
DK/EU-5952-SB	24	120°	1600	Satin brass	27	-	601
DK/EU-5941-DN	10	36°	770	Dark nickel	100	45	-
DK/EU-5941-SB	10	36°	770	Satin brass	100	45	-
DK/EU-5944-DN	8	36°	500	Dark nickel	200	40	-
DK/EU-5944-SB	8	36°	500	Satin brass	200	40	-

ULTRA-SLIM TRACK SYSTEM AIR

SKU	VOLTAGE	COLOR TEMPERATURE	LUMINOUS FLUX	ANGLE
DK/EU-5299-WH	6	3000	250	120°
DK/EU-5300-BK	9	3000	416	120°
DK/EU-5300-WH	9	3000	416	120°
DK/EU-5301-WH	15	3000	650	120°
DK/EU-5303-BK	9	3000	416	120°
DK/EU-5303-WH	9	3000	416	120°
DK/EU-5304-WH	6	3000	400	36°
DK/EU-5305-BK	12	3000	872	36°
DK/EU-5305-WH	12	3000	872	36°
DK/EU-5307-WH	6	3000	400	36°
DK/EU-5308-BK	12	3000	872	36°
DK/EU-5308-WH	12	3000	872	36°
DK/EU-5310-BK	7	3000	446	24°
DK/EU-5310-WH	7	3000	446	24°
DK/EU-5311-BK	12	3000	741	24°
DK/EU-5311-WH	12	3000	741	24°
DK/EU-5313-WH	2	3000	120	24°

76

SKU	VOLTAGE	COLOR TEMPERATURE	LUMINOUS FLUX	ANGLE
DK/EU-5313-BK	2	3000	120	24°
DK/EU-5315-BK	5	3000	277	24°
DK/EU-5315-WH	5	3000	277	24°
DK/EU-5317-BK	4	3000	270	120°
DK/EU-5320-BK	5	3000	270	120°
DK/EU-5320-WH	5	3000	270	120°
DK/EU-5325-BK	12	3000	660	120°
DK/EU-5325-WH	12	3000	660	120°
DK/EU-5327-BK	12	3000	620	360°
DK/EU-5327-WH	12	3000	620	360°
DK/EU-5330-BK	9	4000	416	120°
DK/EU-5330-WH	9	4000	416	120°
DK/EU-5333-BK	9	4000	416	120°
DK/EU-5333-WH	9	4000	416	120°
DK/EU-5335-BK	12	4000	872	36°
DK/EU-5335-WH	12	4000	872	36°
DK/EU-5338-BK	12	4000	872	36°
DK/EU-5338-WH	12	4000	872	36°
DK/EU-5340-BK	7	4000	446	24°
DK/EU-5341-BK	12	4000	741	24°
DK/EU-5341-WH	12	4000	741	24°
DK/EU-5343-BK	2	4000	120	24°
DK/EU-5343-WH	2	4000	120	24°
DK/EU-5345-BK	5	4000	277	24°
DK/EU-5345-WH	5	4000	277	24°
DK/EU-5347-BK	4	4000	270	120°
DK/EU-5350-BK	5	4000	270	120°
DK/EU-5350-WH	5	4000	270	120°
DK/EU-5355-BK	12	4000	660	120°
DK/EU-5357-BK	12	4000	620	360°
DK/EU-5360-BK	9	2700-6500	416	120°
DK/EU-5360-WH	9	2700-6500	416	120°

77

SKU	VOLTAGE	COLOR TEMPERATURE	LUMINOUS FLUX	ANGLE
DK/EU-5363-BK	9	2700-6500	416	120°
DK/EU-5363-WH	9	2700-6500	416	120°
DK/EU-5368-BK	12	2700-6500	872	36°
DK/EU-5368-WH	12	2700-6500	872	36°
DK/EU-5371-BK	12	2700-6500	741	24°
DK/EU-5371-WH	12	2700-6500	741	24°
DK/EU-5375-BK	5	2700-6500	277	24°
DK/EU-5375-WH	5	2700-6500	277	24°

SLIM LED

SKU	VOLTAGE	LUMINOUS FLUX	CASE COLOR	H (HEIGHT)	BEAM ANGLE	COLORFUL TEMPERATURE	DIMMABLE
DK/EU-3000-7W	7W	630 Lm	white	20 mm	60°	3000 K	No
DK/EU-4000-7W	7W	630 Lm	white	20 mm	60°	4000 K	No
DK/EU-3000-7W-M	7 W	630 Lm	white	20 mm	120°	3000 K	No
DK/EU-4000-7W-M	7 W	630 Lm	white	20 mm	120°	4000 K	No
DK/EU-3000-8W DIM	8W	720 Lm	white	25 mm	60°	3000 K	Yes
DK/EU-4000-8W DIM	8W	720 Lm	white	25 mm	60°	4000 K	Yes

RELAY

SKU	MAXIMUM CHANNEL CAPACITY	MAXIMUM CHANNEL POWER FOR LED LAMPS	THE TYPE OF SWITCH SUPPORTED	NUMBER OF CHANNELS	THE FREQUENCY OF THE WI-FI NETWORK	DIMMABLE
RL/EU-1001-SM	2300 W	250 W	keyboard / push button	1	2.4 GHz	No
RL/EU-1002-SM	2300 W	250 W	keyboard / push button	2	2.4 GHz	No
RL/EU-1003-DM	200 W	200 W	push button	1	2.4 GHz	Yes

SPOTLIGHTS

SKU	CASE COLOR	IP	installation depth with SLIM LED module	installation depth with GU5.3 lamp
DK/EU-3101-WH	white	65	35 mm	70 mm
DK/EU-3101-BK	black	65	35 mm	70 mm
DK/EU-3103-WH	white	65	50 mm	85 mm
DK/EU-3103-BK	black	65	50 mm	85 mm
DK/EU-3055-WH	white	20	45 mm	70 mm
DK/EU-3055-BK	white/black	20	45 mm	70 mm
DK/EU-3061-WH	white	20	55mm	90 mm
DK/EU-3061-CT	concrete	20	55mm	90 mm
DK/EU-3061-BK	black	20	55mm	90 mm
DK/EU-3071-WH	white	20	55mm	90 mm
DK/EU-3071-CT	concrete	20	55mm	90 mm
DK/EU-3071-BK	black	20	55mm	90 mm
DK/EU-3072-WH	white	20	55mm	90 mm
DK/EU-3072-BK	black	20	55mm	90 mm
DK/EU-3090-WH	white	20	-	-
DK/EU-3090-CT	concrete	20	-	-
DK/EU-3090-BK	black	20	-	-

NEW · NUEVO

ZENRI EUROPE SWITCH COLLECTION

European mechanisms for contemporary interiors.

Mecanismos europeos para interiores contemporáneos.



PURE

Minimal switches / Interruptores minimalistas



DESIGNED AS A SYSTEM · DISEÑADO COMO SISTEMA

Slim European profile in matte white, graphite and brushed champagne.

Perfil europeo fino en blanco mate, grafito y champán cepillado.

● 1 / 2 GANG

● MATTE + METAL FINISHES

● EU FLUSH-MOUNT FORMAT

TOUCH

Smart control / Control inteligente



DESIGNED AS A SYSTEM · DISEÑADO COMO SISTEMA

Touch panels, dimming and sensors in smoked glass and graphite.

Paneles táctiles, regulación y sensores en cristal ahumado y grafito.

● TOUCH CONTROL

● DIMMING

● PRESENCE SENSING

MODULAR

Power + data / Energía + datos



DESIGNED AS A SYSTEM · DISEÑADO COMO SISTEMA

Combinable frames for Schuko, USB-C, data, switches and dimmers.

Marcos combinables para Schuko, USB-C, datos, interruptores y dimmers.

● SCHUKO

● USB-C + DATA

● 1 / 2 / 3 MODULES

CONTACT · CONTACTO

LET'S BUILD THE NEXT PROJECT.

ZENRI TECHNOLOGY S.L.

CIF B24886814

Calle Carpinteros 10, 1º derecha

28680 Villaviciosa de Odón, Madrid, España

+34 912 122 544

info@zhengrui-tech.com

export@zhengrui-tech.com